




Smart Insert

Minimal detailing and clean lines place the Smart well in any home. Installation into an existing masonry chimney makes it perfect for replacing an inefficient open fireplace or older style insert fire.

Installation into a timber framed cavity can also be achieved by utilising the Smart Insert Vented Zero Clearance Cabinet (VZCC), ECO Built-In flue kit and optional fascia base rail.

Fascia finished in metallic black high temperature paint.

	Clean air approved model
Heat output	15kW peak heat output
Heating area	Heat up to 150m ² / 3 bedroom home
Finish	Metallic black high temperature paint
Wetback	Optional Smart wetback
MfE#	102411 (DRY) / 102426 (WET)
Emission	0.49gms (DRY) / 0.82gms (WET)
Efficiency	68% (DRY) / 67% (WET)
SKU	250-0860

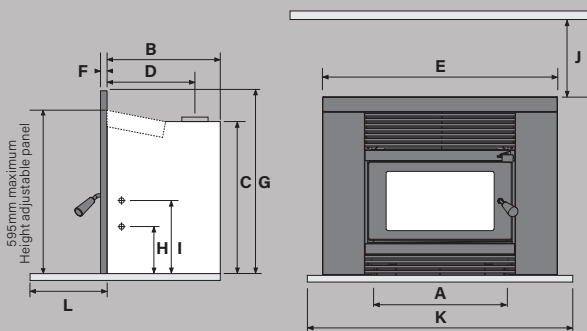

FIREBOX WIDTH	FIREBOX DEPTH	FIREBOX HEIGHT	FLUE CENTRE	FASCIA WIDTH	FASCIA DEPTH	FASCIA HEIGHT	WETBACK INLET	WETBACK OUTLET	MANTEL CLEARANCE	MINIMUM HEARTH WIDTH	MINIMUM HEARTH PROJECTION
A	B	C	D	E	F	G	H	I	J	K	L
560	495	550	405	890	30	672	130	325	475	890	312

All measurements detailed above are in (mm) and do not include the 13mm insulating blanket. Specifications were correct at the time of printing but may alter and those detailed should be used only as a guide. If in doubt, please consult your local Metro Fires stockist.



metrofires
metrofires.co.nz

