




Trend Insert

Designed for installation into an existing masonry chimney making it perfect for replacing an inefficient open fireplace or older insert wood burner. Firebox construction of solid 6mm NZ made steel and firebrick lined for maximum radiant heat.

The thermo fan is required for all installations in a clean air zone and further enhances the convected heat output and circulation. Wetback options are only for properties with a land size of 2Ha or greater (non clean air zones). Fascia finished in metallic black high temperature paint.

	Clean air approved model
Heat output	15kW peak heat output
Heating area	Heat up to 150m ² / 3 bedroom home
Finish	Metallic black high temperature paint
Wetback	Optional 3kW or 4kW wetback (2Ha+ only)
MfE#	101159 (DRY)
Emission	0.91gms (DRY)
Efficiency	65% (DRY)
SKU	250-0870

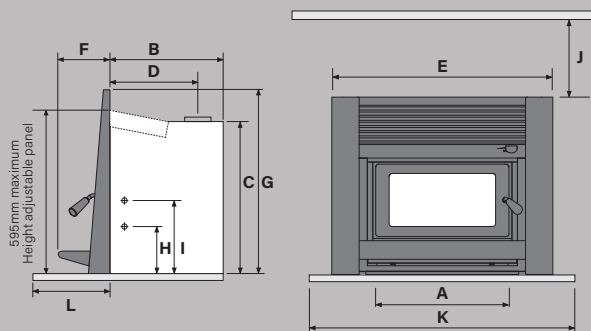

FIREBOX WIDTH	FIREBOX DEPTH	FIREBOX HEIGHT	FLUE CENTRE	FASCIA WIDTH	FASCIA DEPTH	FASCIA HEIGHT	WETBACK INLET	WETBACK OUTLET	MANTEL CLEARANCE	MINIMUM HEARTH WIDTH	MINIMUM HEARTH PROJECTION
A	B	C	D	E	F	G	H	I	J	K	L
560	500	550	405	810	185	650	170	360	340	825	300

All measurements detailed above are in (mm) and do not include the 13mm insulating blanket. Specifications were correct at the time of printing but may alter and those detailed should be used only as a guide. If in doubt, please consult your local Metro Fires stockist.

